



LUCS® Eco

LUCS®

LUcas Controlled Streetlight



LUCS® Compact




Orientierungswerte

Straßenprofil u. Leuchtentyp		maximaler Mastabstand [m] in Abhängigkeit zur Masthöhe H				
S	Leuchte	H=4m	H=5m	H=6m	H=7m	H=8m
S1	Compact Eco	33,5 36,5	38,5 44,0	43,5 51,0	- -	- -
S2	Compact Eco	28,5 33,0	34,0 40,0	39,0 46,0	- -	- -
S3	Compact Eco	- -	- -	31,0 32,0	36,5 37,0	41,0 42,0
S4	Compact Eco	- -	- -	- 31,0	- 36,0	- 41,0




Straßenprofil S1

ähnelt P6-Klasse (DIN EN 13201-2)

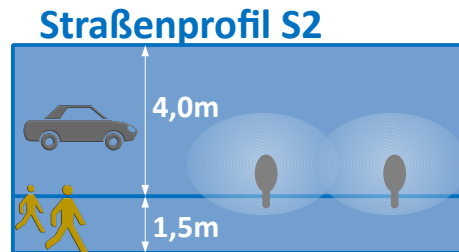


Straßenprofil S2

ähnelt P5-Klasse (DIN EN 13201-2)

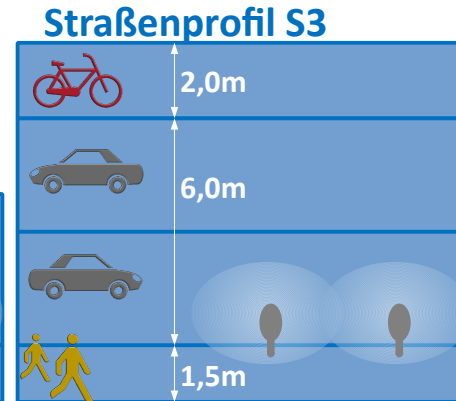

Straßenprofil S3

ähnelt M6-Klasse (DIN EN 13201-2)

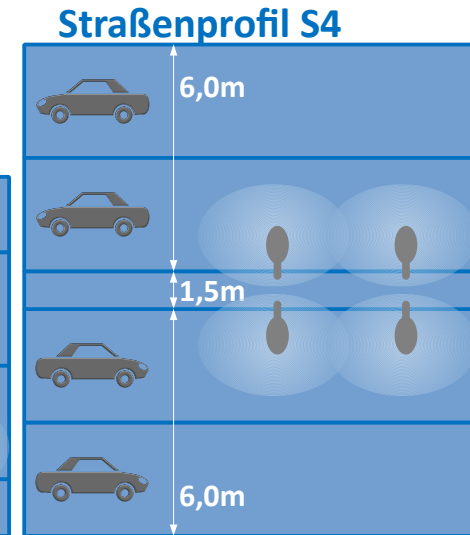

Straßenprofil S4

ähnelt M6-Klasse (DIN EN 13201-2)